


NEW
SECOND FLOOR PLAN

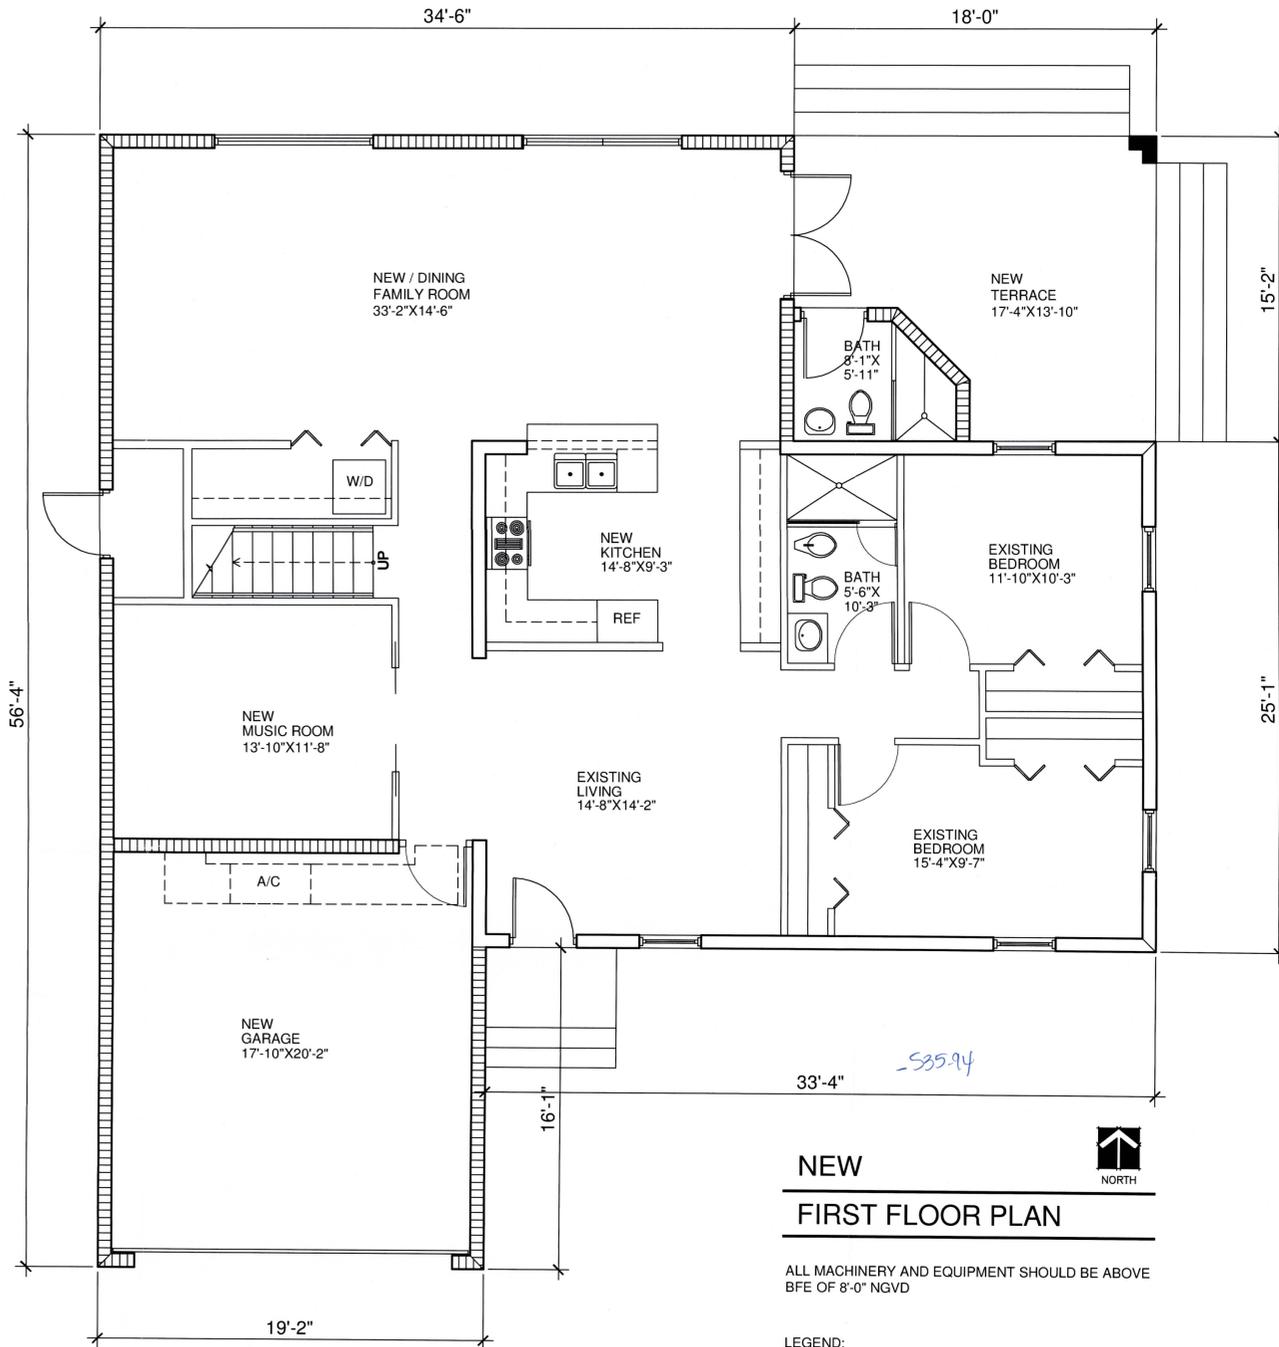

NEW
FIRST FLOOR PLAN

ALL MACHINERY AND EQUIPMENT SHOULD BE ABOVE
BFE OF 8'-0" NGVD

LEGEND:

- existing 8" conc. block wall with 5/8" smooth stucco on the exterior. Referred to building elevations. 2 hour fire rated.
- new 8" conc. block wall with 5/8" smooth stucco on the exterior. Referred to building elevations. 2 hour fire rated. see structural drawings.
- 1/2" Sheetrock Brand Gypsum Panels Firecode Core - 3-5/8" 25 ga. steel studs 16" o.c. - panels screw att. - joints fm. - NR. contractor to modified with 1/2" durock at tubs and showers and green board at wet areas.
- 4" interior partition load bearing (cabinets & grab bars) NR no. 25 Gauge channel shaped studs @ 16 oc. with 1 full layer of 5/8" type x gypsum wallboard applied vertically & attached with with 1" long #6 drywall screws, each side. screws to be 8" oc. at perimeter and 12" oc. at intermediate.

EGRESS WINDOW NOTE:
an outside window or door operable from the inside without the use of tools and providing a clear opening of no less than 20" in width, 24" in height and 5.7 sq. ft. area. the bottom of the opening shall not be more than 44" off the finish floor.

52.5x56.33 = 2951.32
- 535.94

2421.38

-535.94



2640 S. BAYSHORE DRIVE
BLDG. A SUITE 301
MIAMI, FLORIDA 33133
TEL 305 310 4684
JERRY BERRY AIA AIA/CES
LIC # AR0091484

Juan E. Berry R.A.
Fl. Lic. 0091484

PRIVATE RESIDENCE
FLORIDA
5831 SW 51th STREET
MIAMI

ARCHITECTURE
PLANNING
INTERIORS

All design arrangements and items indicated or represented by the drawings are owned by and the property of the client and were created, evolved and developed for use in and in connection with the named project. None of such design arrangements or items shall be used by or disclosed to any person firm or corporation for any purpose whatsoever without the express written permission of Berry Design Studio Inc. or Juan E. Berry R.A.

PROJECT NO.
1440
DATE
12/22/14
REVISIONS
1 0/0/00

SHEET NO

A-2

